

# Tyre Repair Tools

## Angle Wheels




6" Angle Wheel



8" Angle Wheel

Part No.	Diameter	Bore	SSG	STD
110/230/60	6"	60mm	230	
110/330/60	6"	60mm	330	
110/390/60	6"	60mm	390	
110/36/60	6"	60mm		36
110/23/60	6"	60mm		23
110/16/60	6"	60mm		16
120/230/38.1	8"	1 1/2"	230	
120/390/38.1	8"	1 1/2"	390	
120/460/38.1	8"	1 1/2"	460	
120/36/38.1	8"	1 1/2"		36
120/23/38.1	8"	1 1/2"		23
120/16/38.1	8"	1 1/2"		16

## Buffout Wheels

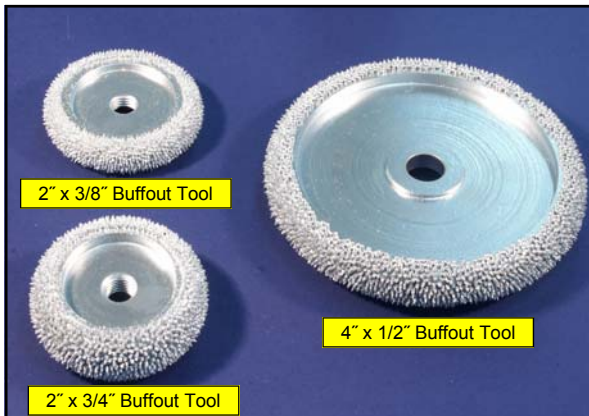

2" x 3/8" Buffout Tool

4" x 1/2" Buffout Tool


2" x 3/4" Buffout Tool

Part No.	Diameter	Width	Bore	SSG	STD
360/230/UNF	2"	3/16"	3/8" UNF. 24 tpi	230	
360/330/UNF	2"	3/16"	3/8" UNF. 24 tpi	330	
360/460/UNF	2"	3/16"	3/8" UNF. 24 tpi	460	
360/36/UNF	2"	3/16"	3/8" UNF. 24 tpi		36
360/23/UNF	2"	3/16"	3/8" UNF. 24 tpi		23
360/16/UNF	2"	3/16"	3/8" UNF. 24 tpi		16

## Buffout Wheels Continued


Part No.	Diameter	Width	Bore	SSG	STD
370/230/UNF	2"	3/8"	3/8" UNF. 24 tpi	230	
370/330/UNF	2"	3/8"	3/8" UNF. 24 tpi	330	
370/460/UNF	2"	3/8"	3/8" UNF. 24 tpi	460	
370/36/UNF	2"	3/8"	3/8" UNF. 24 tpi		36
370/23/UNF	2"	3/8"	3/8" UNF. 24 tpi		23
370/16/UNF	2"	3/8"	3/8" UNF. 24 tpi		16
380/230/UNF	2"	3/4"	3/8" UNF. 24 tpi	230	
380/330/UNF	2"	3/4"	3/8" UNF. 24 tpi	330	
380/460/UNF	2"	3/4"	3/8" UNF. 24 tpi	460	
380/36/UNF	2"	3/4"	3/8" UNF. 24 tpi		36
380/23/UNF	2"	3/4"	3/8" UNF. 24 tpi		23
380/16/UNF	2"	3/4"	3/8" UNF. 24 tpi		16
390/230/12.7	4"	3/8"	1/2"	230	
390/330/12.7	4"	3/8"	1/2"	330	
390/460/12.7	4"	3/8"	1/2"	460	
390/36/12.7	4"	3/8"	1/2"		36
390/23/12.7	4"	3/8"	1/2"		23
390/16/12.7	4"	3/8"	1/2"		16
400/230/12.7	4"	1/2"	1/2"	230	
400/330/12.7	4"	1/2"	1/2"	330	
400/460/12.7	4"	1/2"	1/2"	460	
400/36/12.7	4"	1/2"	1/2"		36
400/23/12.7	4"	1/2"	1/2"		23
400/16/12.7	4"	1/2"	1/2"		16
410/230/12.7	5"	1/2"	1/2"	230	
410/330/12.7	5"	1/2"	1/2"	330	
410/460/12.7	5"	1/2"	1/2"	460	
410/36/12.7	5"	1/2"	1/2"		36
410/23/12.7	5"	1/2"	1/2"		23
410/16/12.7	5"	1/2"	1/2"		16

## Adaptors to suit 3/8" UNF. 24 tpi



Part Number 640/6 3/8" UNF. 24 tpi to 6mm Dia stem

Part Number 640/6.35 3/8" UNF. 24 tpi to 1/4" Dia stem




SSG Coating

Standard Grit Coating


# Tyre Repair Tools

## Contour Wheels

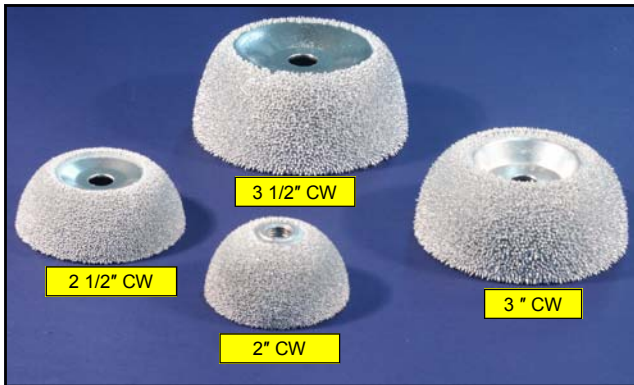


Part No.	Diameter	Bore	SSG	STD
130/170/UNF	2"	3/8" UNF. 24 tpi	170	
130/230/UNF	2"	3/8" UNF. 24 tpi	230	
130/330/UNF	2"	3/8" UNF. 24 tpi	330	
130/36/UNF	2"	3/8" UNF. 24 tpi		36
130/23/UNF	2"	3/8" UNF. 24 tpi		23
130/16/UNF	2"	3/8" UNF. 24 tpi		16
140/170/UNF	2 1/2"	3/8" UNF. 24 tpi	170	
140/230/UNF	2 1/2"	3/8" UNF. 24 tpi	230	
140/330/UNF	2 1/2"	3/8" UNF. 24 tpi	330	
140/36/UNF	2 1/2"	3/8" UNF. 24 tpi		36
140/23/UNF	2 1/2"	3/8" UNF. 24 tpi		23
140/16/UNF	2 1/2"	3/8" UNF. 24 tpi		16
150/170/9.53	2 1/2"	3/8"	170	
150/230/9.53	2 1/2"	3/8"	230	
150/330/9.53	2 1/2"	3/8"	330	
150/36/9.53	2 1/2"	3/8"		36
150/23/9.53	2 1/2"	3/8"		23
150/16/9.53	2 1/2"	3/8"		16
160/170/9.53	3"	3/8"	170	
160/230/9.53	3"	3/8"	230	
160/330/9.53	3"	3/8"	330	
160/36/9.53	3"	3/8"		36
160/23/9.53	3"	3/8"		23
160/16/9.53	3"	3/8"		16

## Contour Wheels continued

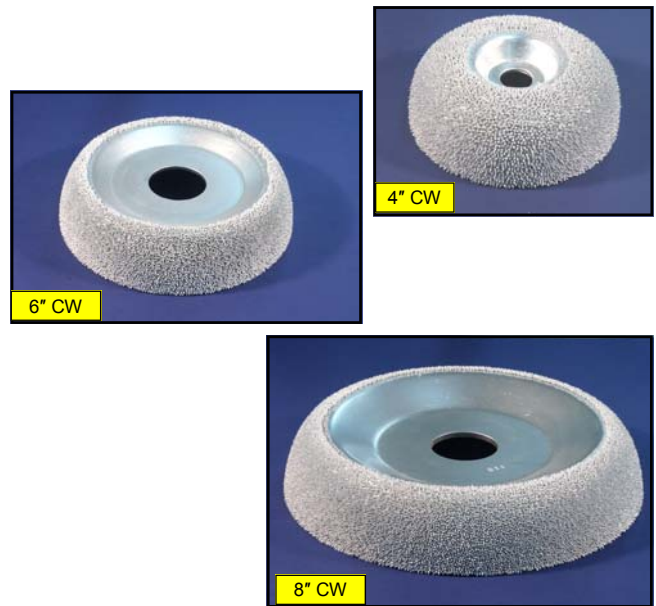

Part No.	Diameter	Bore	SSG	STD
170/170/9.53	3 1/2"	3/8"	170	
170/230/9.53	3 1/2"	3/8"	230	
170/330/9.53	3 1/2"	3/8"	330	
170/36/9.53	3 1/2"	3/8"		36
170/23/9.53	3 1/2"	3/8"		23
170/16/9.53	3 1/2"	3/8"		16
180/230/12.7	4"	1/2"	230	
180/330/12.7	4"	1/2"	330	
180/460/12.7	4"	1/2"	460	
180/36/12.7	4"	1/2"		36
180/23/12.7	4"	1/2"		23
180/16/12.7	4"	1/2"		16
190/230/38.1	6"	1 1/2"	230	
190/390/38.1	6"	1 1/2"	390	
190/460/38.1	6"	1 1/2"	460	
190/36/38.1	6"	1 1/2"		36
190/23/38.1	6"	1 1/2"		23
190/16/38.1	6"	1 1/2"		16
200/230/38.1	8"	1 1/2"	230	
200/390/38.1	8"	1 1/2"	390	
200/460/38.1	8"	1 1/2"	460	
200/36/38.1	8"	1 1/2"		36
200/23/38.1	8"	1 1/2"		23
200/16/38.1	8"	1 1/2"		16



SSG Coating

Standard Grit Coating

# Tyre Repair Tools

## Donut Wheels



5" Donut Wheel



6" Donut Wheel



8" Donut Wheel

Part No.	Diameter	Bore	SSG	STD
210/230/12.7	5"	1/2"	230	
210/390/12.7	5"	1/2"	390	
210/460/12.7	5"	1/2"	460	
210/36/12.7	5"	1/2"		36
210/23/12.7	5"	1/2"		23
210/16/12.7	5"	1/2"		16
220/230/38.1	6"	1 1/2"	230	
220/390/38.1	6"	1 1/2"	390	
220/460/38.1	6"	1 1/2"	460	
220/36/38.1	6"	1 1/2"		36
220/23/38.1	6"	1 1/2"		23
220/16/38.1	6"	1 1/2"		16
220/230/50	6"	50 mm	230	
220/390/50	6"	50 mm	390	
220/460/50	6"	50 mm	460	
220/36/50	6"	50 mm		36
220/23/50	6"	50 mm		23
220/16/50	6"	50 mm		16
220/230/60	6"	60 mm	230	
220/390/60	6"	60 mm	390	
220/460/60	6"	60 mm	460	
220/36/60	6"	60 mm		36
220/23/60	6"	60 mm		23
220/16/60	6"	60 mm		16

## Donut Wheels continued

Part No.	Diameter	Bore	SSG	STD
230/230/20	8"	20mm	230	
230/390/20	8"	20mm	390	
230/460/20	8"	20mm	460	
230/16/20	8"	20mm		16
230/23/20	8"	20mm		23
230/36/20	8"	20mm		36

## Flat Face Unit Wheels



3" x 1" Flat Face Unit Wheel

Part No.	Diameter	Width	Bore	SSG	STD
240/230/9.53	3"	1"	3/8"	230	
240/390/9.53	3"	1"	3/8"	390	
240/460/9.53	3"	1"	3/8"	460	
240/36/9.53	3"	1"	3/8"		36
240/23/9.53	3"	1"	3/8"		23
240/16/9.53	3"	1"	3/8"		16
240/230/12.7	3"	1"	1/2"	230	
240/390/12.7	3"	1"	1/2"	390	
240/460/12.7	3"	1"	1/2"	460	
240/36/12.7	3"	1"	1/2"		36
240/23/12.7	3"	1"	1/2"		23
240/16/12.7	3"	1"	1/2"		16
250/230/9.53	3"	2"	3/8"	230	
250/390/9.53	3"	2"	3/8"	390	
250/460/9.53	3"	2"	3/8"	460	
250/36/9.53	3"	2"	3/8"		36
250/23/9.53	3"	2"	3/8"		23
250/16/9.53	3"	2"	3/8"		16
250/230/12.7	3"	2"	1/2"	230	
250/390/12.7	3"	2"	1/2"	390	
250/460/12.7	3"	2"	1/2"	460	
250/36/12.7	3"	2"	1/2"		36
250/23/12.7	3"	2"	1/2"		23
250/16/12.7	3"	2"	1/2"		16



SSG Coating

Standard Grit Coating

# Tyre Repair Tools

## Flat Face Unit Wheels continued



4" x 2" Flat Face Unit Wheel


Part No.	Diameter	Width	Bore	SSG	STD
260/230/12.7	4"	1"	1/2"	230	
260/390/12.7	4"	1"	1/2"	390	
260/460/12.7	4"	1"	1/2"	460	
260/16/12.7	4"	1"	1/2"		16
260/23/12.7	4"	1"	1/2"		23
260/36/12.7	4"	1"	1/2"		36
270/230/12.7	4"	1 1/2"	1/2"	230	
270/390/12.7	4"	1 1/2"	1/2"	390	
270/460/12.7	4"	1 1/2"	1/2"	460	
270/16/12.7	4"	1 1/2"	1/2"		16
270/23/12.7	4"	1 1/2"	1/2"		23
270/36/12.7	4"	1 1/2"	1/2"		36
280/230/12.7	4"	2"	1/2"	230	
280/390/12.7	4"	2"	1/2"	390	
280/460/12.7	4"	2"	1/2"	460	
280/16/12.7	4"	2"	1/2"		16
280/23/12.7	4"	2"	1/2"		23
280/36/12.7	4"	2"	1/2"		36
280/230/15.88	4"	2"	1/2"	230	
280/390/15.88	4"	2"	3/8"	390	
280/460/15.88	4"	2"	5/8"	460	
280/16/15.88	4"	2"	5/8"		16
280/23/15.88	4"	2"	5/8"		23
280/36/15.88	4"	2"	5/8"		36
280/230/25.4	4"	2"	1"	230	
280/390/25.4	4"	2"	1"	390	
280/460/25.4	4"	2"	1"	460	
280/16/25.4	4"	2"	1"		16
280/23/25.4	4"	2"	1"		23
280/36/25.4	4"	2"	1"		36

## Flat Face Unit Wheels continued



9" x 1 1/2" Flat Face Unit Wheel

Part No.	Diameter	Width	Bore	SSG	STD
290/230/38.1	8"	1 1/2"	1 1/2"	230	
290/390/38.1	8"	1 1/2"	1 1/2"	390	
290/460/38.1	8"	1 1/2"	1 1/2"	460	
290/16/38.1	8"	1 1/2"	1 1/2"		16
290/23/38.1	8"	1 1/2"	1 1/2"		23
290/36/38.1	8"	1 1/2"	1 1/2"		36
290/230/50	8"	1 1/2"	50mm	230	
290/390/50	8"	1 1/2"	50mm	390	
290/460/50	8"	1 1/2"	50mm	460	
290/16/50	8"	1 1/2"	50mm		16
290/23/50	8"	1 1/2"	50mm		23
290/36/50	8"	1 1/2"	50mm		36
290/230/60	8"	1 1/2"	60mm	230	
290/390/60	8"	1 1/2"	60mm	390	
290/460/60	8"	1 1/2"	60mm	460	
290/16/60	8"	1 1/2"	60mm		16
290/23/60	8"	1 1/2"	60mm		23
290/36/60	8"	1 1/2"	60mm		36
300/230/38.1	9"	1 1/2"	1 1/2"	230	
300/390/38.1	9"	1 1/2"	1 1/2"	390	
300/460/38.1	9"	1 1/2"	1 1/2"	460	
300/16/38.1	9"	1 1/2"	1 1/2"		16
300/23/38.1	9"	1 1/2"	1 1/2"		23
300/36/38.1	9"	1 1/2"	1 1/2"		36
300/230/50	9"	1 1/2"	50mm	230	
300/390/50	9"	1 1/2"	50mm	390	
300/460/50	9"	1 1/2"	50mm	460	
300/16/50	9"	1 1/2"	50mm		16
300/23/50	9"	1 1/2"	50mm		23
300/36/50	9"	1 1/2"	50mm		36
300/230/60	9"	1 1/2"	60mm	230	
300/390/60	9"	1 1/2"	60mm	390	
300/460/60	9"	1 1/2"	60mm	460	
300/16/60	9"	1 1/2"	60mm		16
300/23/60	9"	1 1/2"	60mm		23
300/36/60	9"	1 1/2"	60mm		36




SSG Coating

Standard Grit Coating



# Tyre Repair Tools

## Pencil Rasps

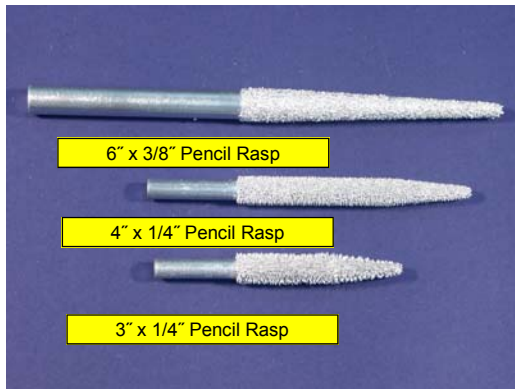


Part No.	Length	Shank Dia	SSG	STD
310/230/6.35	2½"	¼"	230	
310/330/6.35	2½"	¼"	330	
310/36/6.35	2½"	¼"		36
310/16/6.35	2½"	¼"		16
315/230/6	2½"	6mm	230	
315/330/6	2½"	6mm	330	
315/36/6	2½"	6mm		36
315/16/6	2½"	6mm		16
320/230/6.35	3"	¼"	230	
320/330/6.35	3"	¼"	330	
320/36/6.35	3"	¼"		36
320/16/6.35	3"	¼"		16
325/230/6	3"	6mm	230	
325/330/6	3"	6mm	330	
325/36/6	3"	6mm		36
325/16/6	3"	6mm		16
340/230/6.35	4"	¼"	230	
340/330/6.35	4"	¼"	330	
340/36/6.35	4"	¼"		36
340/16/6.35	4"	¼"		16
345/230/6	4"	6mm	230	
345/330/6	4"	6mm	330	
345/36/6	4"	6mm		36
345/16/6	4"	6mm		16
350/230/9.52	6"	⅜"	230	
350/330/9.52	6"	⅜"	330	
350/36/9.52	6"	⅜"		36
350/16/9.52	6"	⅜"		16

## Rotary Knife




Part No.	Diameter	Bore Dia	SSG	STD
420/240/50.8	6"	2"		240
420/120/50.8	6"	2"		120
425/240/32	7"	32mm		240
425/120/32	7"	32mm		120

## Rotor Saw

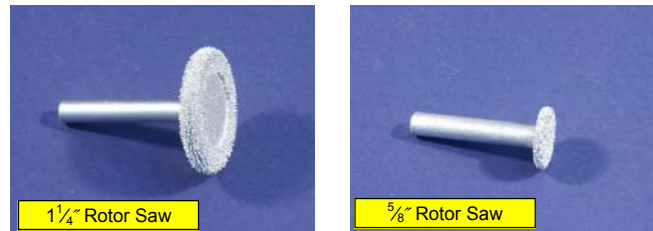

Part No.	Diameter	Width	Shank Dia	SSG	STD
440/36/6.35	⅝"	1/16"	¼"		36
430/230/6.35	1¼"	⅛"	¼"	230	
430/330/6.35	1¼"	⅛"	¼"	330	



SSG Coating

Standard Grit Coating

# Tyre Repair Tools

## Round Face Wheel



6" Round Face Wheel

Part No.	Diameter	Width	Bore	SSG	STD
450/33/38.1	6"		1½"	330	
450/330/50	6"		50 mm	330	
450/330/60	6"		60 mm	330	

## Round Nose



1" Round Nose

Part No.	Diameter	Length	Bore	SSG	STD
460/230/UNF	19mm	38mm	⅜" UNF. 24 tpi	230	
460/330/UNF	19mm	38mm	⅜" UNF. 24 tpi	330	
470/230/UNF	1"	1½"	⅜" UNF. 24 tpi	230	
470/330/UNF	1"	1½"	⅜" UNF. 24 tpi	330	

## Sanding Disc



4" Sanding Disc

Part No.	Diameter	Bore	SSG	STD
490/36/16	4"	16mm		36
490/16/16	4"	16mm		16
490/230/16	4"	16mm		230
490/330/16	4"	16mm		330
490/460/16	4"	16mm		460
500/36/22.2	7"	⅞"		36
500/16/22.2	7"	⅞"		16
500/230/22.2	7"	⅞"		230
500/330/22.2	7"	⅞"		330
500/460/22.2	7"	⅞"		460

## Spheres



1" Sphere




1" Sphere UNF



40mm Sphere

Part No.	Diameter	Shank Dia	Length	SSG	STD
520/230/6.35	¾"	¼"	1½"	230	
520/330/6.35	¾"	¼"	1½"	330	
520/460/6.35	¾"	¼"	1½"	460	
530/230/6.35	1"	¼"	1½"	230	
530/330/6.35	1"	¼"	1½"	330	
530/460/6.35	1"	¼"	1½"	460	
540/230/UNF	1"	⅜" UNF. 24 tpi		230	
540/330/UNF	1"	⅜" UNF. 24 tpi		330	
540/460/UNF	1"	⅜" UNF. 24 tpi		460	
550/230/9.53	1"	⅜"	4"	230	
550/330/9.53	1"	⅜"	4"	330	
550/460/9.53	1"	⅜"	4"	460	
560/230/WHIT	40 mm	½" Whitworth	60 mm	230	
560/330/WHIT	40 mm	½" Whitworth	60 mm	330	
560/460/WHIT	40 mm	½" Whitworth	60 mm	460	




SSG Coating

Standard Grit Coating

# Tyre Repair Tools

## Taper Tools




Part No.	Diameter	Length	Thread	SSG	STD
590/230/UNF	3/4"	4"	3/8" UNF. 24 tpi	230	
590/330/UNF	3/4"	4"	3/8" UNF. 24 tpi	330	
590/460/UNF	3/4"	4"	3/8" UNF. 24 tpi	460	
580/230/UNF	7/8"	2"	3/8" UNF. 24 tpi	230	
580/330/UNF	7/8"	2"	3/8" UNF. 24 tpi	330	
580/460/UNF	7/8"	2"	3/8" UNF. 24 tpi	460	
570/230/UNF	1"	1 1/2"	3/8" UNF. 24 tpi	230	
570/330/UNF	1"	1 1/2"	3/8" UNF. 24 tpi	330	
570/460/UNF	1"	1 1/2"	3/8" UNF. 24 tpi	460	
600/230/WHIT	40 mm	60 mm	1/2" Whitworth	230	
600/330/WHIT	40 mm	60 mm	1/2" Whitworth	330	
600/460/WHIT	40 mm	60 mm	1/2" Whitworth	460	

## Vane Wheels




Part No.	Diameter	Width	Bore	SSG	STD
610/230/60	6"	1/4"	60 mm	230	
610/330/60	6"	1/4"	60 mm	330	
610/460/60	6"	1/4"	60 mm	460	
620/230/55	8"	1/4"	55 mm	230	
620/330/55	8"	1/4"	55 mm	330	
620/460/55	8"	1/4"	55 mm	460	
611	Vane Wheel Spacer for 6" wheel				
621	Vane Wheel Spacer for 8" wheel				

## Vee Wheels



Part No.	Diameter	Shank Dia	Length	SSG	STD
630/36/6.35	2"	1/4"	1 1/2"		36
630/230/6.35	2"	1/4"	1 1/2"	230	
635/36/6.35	3"	1/4"	3"		36
635/230/6.35	3"	1/4"	3"	230	



SSG Coating

Standard Grit Coating